


Data Sheet of 32" Floor Standing Self Payment Kiosk (Windows version)

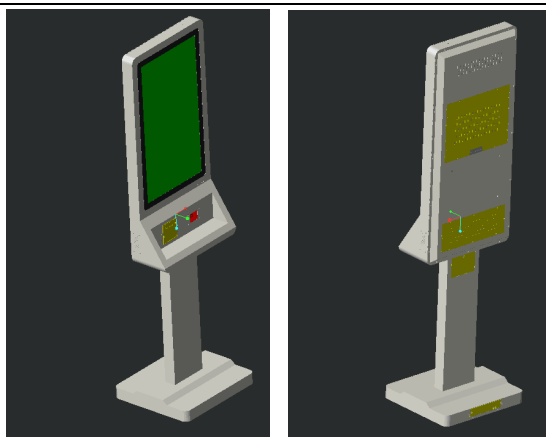

Specifications

Model No.	SP732
Panel size	32" TFT-LCD
Display area(mm)/mode	700(H)×394(V)/ 9:16
Maximum resolution	1080x1920
Display color	16.7M
Brightness (nits)	350cd/m ²
Contrast	1000:1
Visual angle	178°/178°
Response time	5ms
Life(hrs)	>60,000(hrs)
Input and output	
HDMI out	1
USB	2 (USB 2.0 interface)
Mini USB	1
LAN	1
Speaker	2×5W (8Ω)
WIFI model	Included
Video	
Color system	PAL/NTSC/SECAM
OSD display(screen menu display)	
Menu language	English
Operation System(Optional)	Windows Network Version/Android
Power	
Power supply	AC100~240V 50 /60 HZ
Maximum power consumption	≅ 220W
Standby power consumption	<5W

Temperature	
Working temperature	0℃～50℃
Storage temperature	－10℃～60℃
Working humidity	20%～80%
Storage humidity	5%～95%
Appearance	
Color/Appearance	White, Black,Customized
Case	Metal case SPCC
Installation	Floor-standing
Windows computer specifications	
CPU	Intel I3, 2.4GHz/Customized
Graphics card	Integrated
Network card	Integrated 10/100/1000M adaptive
Memory	4G/8GB/16GB
SSD	120G/Customized
System	Windows 10 trail version 1903 pre-install
Touch Panel	
Specification	Capacitive touch
Positioning	±2mms
Transmittance	≥92%
Hardness	7H
Touch points	10 points
Response time	≤10ms
HD Camera	
Model No.	C920
Max resolution	1080p/30fps - 720p/30fps
Photosensitive element	CMOS
Dynamic resolution	1280×720
Static resolution	1280×960
Interface Type	USB2.0 (supports USB3.0)
Drive Type	No Drive Edition
System support	windows® 10 or higher, windows 8, windows 7, the support video call client is available in USB Video Category (UVC)
QR Code scanner (Optional)	
Model NO.	6410
Installation type	Fixed installation
Identifiable code	One-dimensional code such as CODE128, EAN13, EAN8, CODE39, CODE93, UPC-A; and mainstream QR code such as QR code, GM code, Hanxin code, PDF417, DataMatrix
Receipt printer	
Model NO.	MS-FPT302/Customized
Printing type	Line thermal printing
Paper width	80mm
Paper speed	250 mm/s(max)
Point density	8 dots/mm
Print points	576dots/line

Print width	72mm(max)
Paper feeding method	Easy loading paper
Print length	100KM
Paper cutting method	Sliding
Paper cutting condition	Half cut, full cut
Paper thickness	60 - 120 um
Cutter life	1000,000 times
Operating Voltage	DC24 ± 10% V
Average current	24V/2A (Effective print points 25%) Peak
Size (W*D*H)	W127mm * D127mm * H100mm
Detailed Functions	
Video Format	MPEG1/MPEG2/MPEG4
Audio Format	Wave/MP3/WMA
Image Format	JPEG/PNG/GIF
Image Resolution	480P/720P/1080P